



TESON TILE ZIP BACKTILE ADHESIVE (TE-TZ-5K-L)

Description: Teson TileZip is used as a back tile adhesive to securely install tiles with enhanced adhesion and impact resistance. Compared to the traditional thick-bed method, it reduces the usage of cementitious tile adhesive which shortens installation time and cost.

Application:



- Interior and exterior concrete structures
- Bathrooms
- Kitchens
- Elevator halls
- Staircases
- Lobby

Advantages:

- Excellent bonding adhesion with lower risk of tile falling.
- Improve tile detachment factors which induce adhesion failure.
- High impact resistance against water and alkaline.
- Quick and reliable application on the job site.



Application Reference:

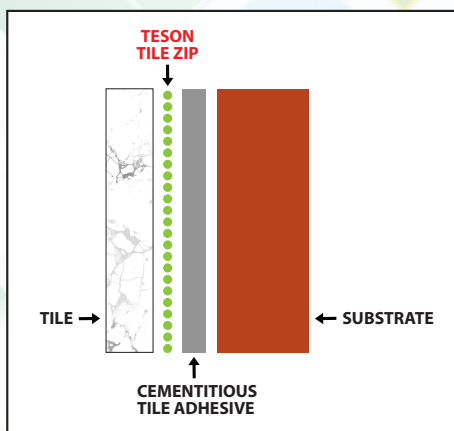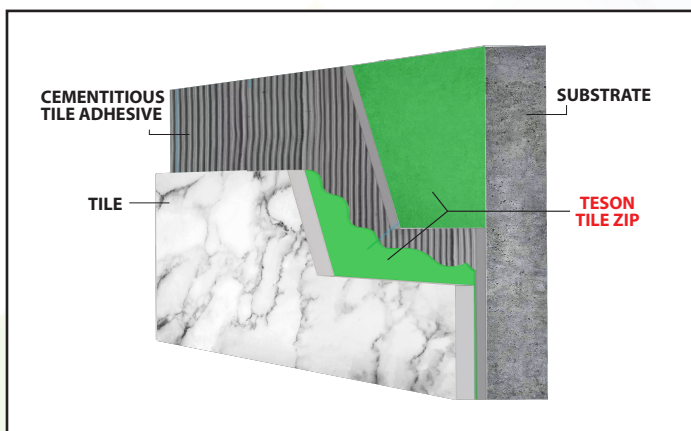

Product Range:

PRODUCT CODE	PACKING SIZE	PACKING FORM	COLOUR
TE-TZ-5K-L	5KG	Pail	GREENISH WHITE



TESON TILE ZIP BACKTILE ADHESIVE (TE-TZ-5K-L)

Teson TileZip is used as a back tile adhesive to securely install tiles with enhanced adhesion and impact resistance. Compared to the traditional thick-bed method, it reduces the usage of cementitious tile adhesive which shortens installation time and cost.

APPLICATION:

- Interior and exterior concrete structures
- Bathrooms
- Kitchens
- Elevator halls
- Staircases
- Lobby

ADVANTAGES:

- Excellent bonding adhesion with lower risk of tile falling.
- Improve tile detachment factors which induce adhesion failure.
- High impact resistance against water and alkaline.
- Quick and reliable application on the job site.

APPLICATION PROCEDURES:

- a) Open the original packing directly apply the mixture by using paint brush or roller. Do not dilute with water, solvent, or any admixture.
- b) Apply Teson TileZip directly on the back surface of tile with roller or brush.
- c) Wait until it is touch dry. Allow it to dry at room temperature about 30 – 60 minutes. The adhesive will feel slightly tacky.
- d) Do not apply to wet surfaces or surface where there may be hydrostatic pressure such as retaining walls and swimming pool.
- e) Attach the tile on the surface of the wall's adhesive firmly.

PROPERTIES:

- Physical Form : Liquid dispersion
- Color : Greenish White
- Odor : Mild Odour

COVERAGE:

Recommended consumption approximately 100-150g/m² depending on the porosity and surface of the substrate.

STORAGE / PACKAGING:

Store in a dry and cool place. Protect against moisture. Store container in a well-ventilated place. 12 months if stored in unopened-original packaging in a dry place at temperature up to 45°C.

NOTE:



Attention to the weather to avoid rainy day, rain will affect bonding performance.

PRECAUTION:

Health & Safety

TESON TILE ZIP is safe to use as it is non-flammable and non-toxic. However it is still advisable to follow good working practice and use only in well ventilated areas.

APPLICATION REFERENCE:

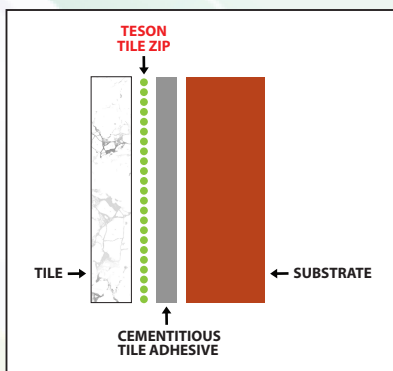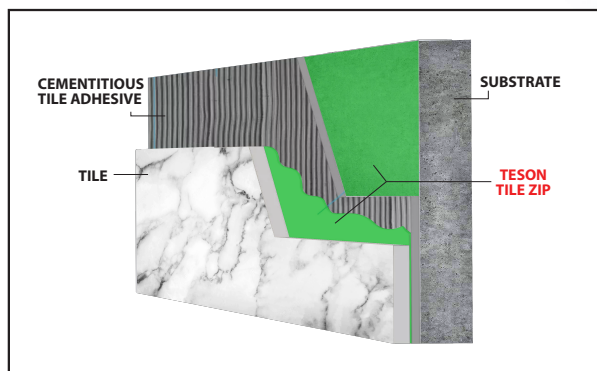

LIMITED WARRANTY:

Sellers and manufacturers only obligation shall be replacement of such quantity of product proved to be defective. All advice given herewith is to be best of knowledge, true and accurate. All recommendations or suggestions are made without guarantee. Since the conditions of use are beyond our control, the seller or manufacturer shall not be liable for any injuries, loss or damage, direct or consequential arising from the use of or the failure of the product. Before using, user shall determine the suitability of the product for his intended use and user assumes all risk and liability.